

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number
WO 03/076715 A2

(51) International Patent Classification⁷: **D21H**

FIN-33700 Tampere (FI). KÄSMÄ, Veli [FI/FI]; Lintu-
idankatu 33 G 26, FIN-33340 Tampere (FI).

(21) International Application Number: PCT/FI03/00180

(74) Agent: **TAMPEREEN PATENTTITOIMISTO OY**;
Hermiankatu 12 B, FIN-33720 Tampere (FI).

(22) International Filing Date: 11 March 2003 (11.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
20020479 14 March 2002 (14.03.2002) FI
20021253 26 June 2002 (26.06.2002) FI

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(71) Applicant (*for all designated States except US*): **METSO
PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130
Helsinki (FI).


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **PUTKISTO, Kaisa**
[FI/FI]; Poukamankatu 7 C 8, FIN-33720 Tampere (FI).
MAIJALA, Juha [FI/FI]; Messukylänkatu 37 B 12,

[Continued on next page]

(54) Title: METHOD FOR TREATING POWDERY PARTICLES

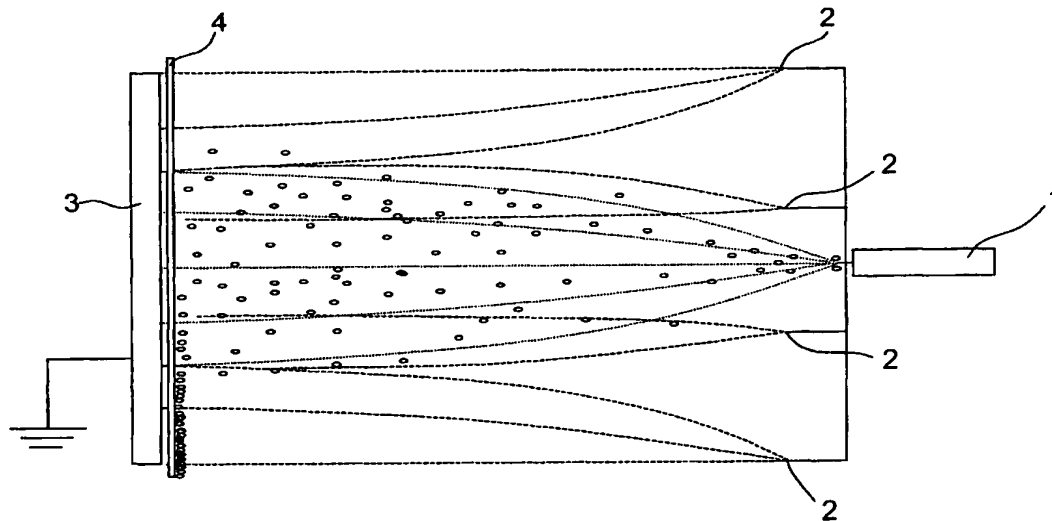

(57) Abstract: The invention relates to a method for a preliminary treatment of particles of a powder in a dry surface treatment process before applying the powder particles on a surface of a substrate by utilizing an electric field created by electrodes. The electrodes are located at opposite sides of the substrate in such a way that at least one first electrode is located at the side of the substrate to be coated, and at least one second electrode is located at the opposite side of the substrate. In the method of the invention, the particles of the powder are pre-charged before bringing them into the electric field.

WO 03/076715 A2



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Method for treating powdery particles

5 The present invention relates to a method for a preliminary treatment of particles of a powder in a dry surface treatment process before applying the powder particles on a surface of a substrate by utilizing an electric field created by electrodes, which are located at opposite sides of the substrate in such a way that at least one first electrode is located at the side of the substrate to be coated, and at least one second electrode is located at the opposite side of the substrate.

10

The dry surface treatment process of different substrates, such as paper, board, plastic, or metallic substrates, comprises dry powder application followed by a finishing step, for example thermomechanical fixing. The application of the powder utilises an electric field to transfer the powder particles to the surface of the substrate and to enable an electrostatic adhesion prior to the finishing. Both the final adhesion and the surface smoothing of the dry powder are executed simultaneously through thermomechanical treatment or another suitable treatment. The powder, which is used, may be a coating composition comprising inorganic particles and binder particles, or a film forming material, which can be finished so that a pinhole-free film layer is formed.

15

20

25 In a dry surface treatment process, the charging of the powder has an essential role. If some inadequacies relating an amount of the charged particles, or a level of charging of a particle occur, it has an effect on efficiency and a cleanliness of the process. If the particles of the dry powder do not adhere properly to a substrate it causes an uneven powder layer on the substrate, dusting, material losses, and possibly harmful deposits.

30

The method of the invention is an enhancement to the dry surface treatment process, and it diminishes the above-mentioned problems of the dry surface treatment process. The method is characterized in that the particles of the powder are pre-charged before bringing them into the electric field.

35

The method of the invention makes the efficiency of the dry surface treatment process better because the dry powder places itself on the substrate properly, and no material losses occur. As a consequence, also a coating layer of a higher quality is achieved. A clean process without dusting is also attained.

In a dry surface treatment process, an electric field is created between electrodes, which are in different potentials. A substrate to be coated is between the electrodes. At least one of the electrodes may be a corona charging electrode which charges surrounding gas. The charged gas atoms, molecules or molecule groups attach to particles of the coating powder, thus giving a charge to the particle.

A force according to the equation $\vec{F} = q \vec{E}$, where \vec{E} is an electric field, F is the force, and q is a charge, has an influence on a charge q in an electric field E . The force tends to convey the charge in the electric field, and in a stationary electric field only a position of the charge is meaningful. When a potential of the electric field is known, the strength of the electric field in a certain position is derived from the following equation:

$$\vec{E} = - \frac{\partial V}{\partial n} \vec{u}_n,$$

where

\vec{E} is the strength of the electric field,
 V is the potential of the electric field, and
 \vec{u}_n is the unit vector of the perpendicular of the plane.

The strength of the electric field can also be evaluated by the electric charge density when the relation between the electric flux density and the strength of the electric field is taken into consideration. The equation below is Gauss's law.

$$\frac{\partial E_x}{\partial x} + \frac{\partial E_y}{\partial y} + \frac{\partial E_z}{\partial z} = \frac{\rho}{\epsilon},$$

where

- 5 $E_{x,y,z}$ are the dimensional strengths of the electric field,
 ρ is a local electric charge density, and
 ε is the dielectric constant of the examined space.

10 As seen from the equation above, in a stationary electric field the charges create the field, and the distribution and the magnitude of the charges determine the strength of the field in different positions.

15 If a conductive particle (radius a , charge q) is exposed to an uniform electric field E_0 in a unipolaric ion concentration N_0 , the electric field at the particle is formed from two components, namely an electric field created by the particle itself due to its own charge, and an outer electric field which is changed by the charge of the particle. This field is described by an equation

$$E = 3E_0 \cos\theta - \frac{q}{4\pi\varepsilon_0 a^2}$$

20

where

- 25 E is the resultant electric field,
 θ is the incidence angle of the electric field focused to a particle,
 ε_0 is the dielectric constant of the free space,
 a is the diameter of the particle, and
 q is the charge of the particle.

30 The term $3E_0 \cos\theta$ describes the change of the electric field as a consequence of the presence of the conductive particle. E_0 is the undisturbed field. The charging of the particles is great, and it is restricted only by the ions conveyed onto the particle by the electric field. The change of the charge is defined as a stream, and it can be
35 described by the equation

4

$$\frac{dq}{dt} = N_0 e b \int_{\theta}^{\theta_0} \left(3E_0 \cos\theta - \frac{q}{4\pi \epsilon_0 a^2} \right) dA \quad (4)$$

where

- 5 q is the charge of the particle,
 b is the mobility of ion,
 e is the charge of the electron,
 θ_0 is the critical angle of to the particle streaming charge,
 dA is the area of the component $= 2 \pi a^2 \sin\theta d\theta$, and
 10 t is time

The above mentioned equation shows that the charge continues to stream to the particle until the field created by the particle and the outer field are balanced out. When a saturation charge is known, the level of charging can be derived from the equation

$$q(t) = q_s \frac{1}{1 + \tau/t}$$

where $\tau = 4\epsilon_0/N_0eb$

20

For conductive materials, the saturation charge is $q_s = 12\pi a^2 \epsilon_0 E_0$. For non-conductive materials, to the equation shall be added $3\kappa/(\kappa+2)$.

The diffusion charge has also an effect on the particle. As a function of time, the diffusion charge can be expressed by the equation

25

$$q(t) = \frac{akT}{e} \ln \left(1 + \frac{\pi a v N_0 e^2 t}{kT} \right)$$

where

30

- k is Boltzman's constant,
 T is the temperature (K),
 e is the charge of the electron,
 v is the thermal velocity of ions (rms),

5

N_0 is the average amount of molecules in a certain volume,
and
 t is time.

5

As can be concluded from the above mentioned equations, time is an important factor in charging of particles.

10 The pre-charging of the particles of the coating powder can be made either when the particles are brought at the final electric field or before bringing them into the final electric field. The aim of the pre-charging is to obtain a longer charging period compared to the process having only one charging step. The benefits of the longer charging period are a more homogenous charging level and a greater force of the electric
15 field having influence on the particle.

The first embodiment of the invention is to pre-charge the particles of the coating powder when they are about to arrive into the final electric field. The pre-charging process is conducted in such a way that at least
20 one charging electrode comprising a feeding nozzle is located farther away from the substrate to be coated. The dry powder is led to the charging electrode, and particles of the dry powder are charged by the charging electrode. After that the pre-charged particles enter to the final electric field formed by the other charging electrodes, for example
25 corona charging electrodes, and a grounding electrode, or an electrode having an opposite sign. The pre-charged particles are blown towards a substrate to be coated. The substrate is preferably in a web form. The grounding electrode can be a stationary platy electrode, or it can be a roll rotating about its axis. The rotating roll is a preferred choice.

30

The second embodiment of the invention is to pre-charge the particles of the coating powder in another electric field(s) before the final electric field. In this embodiment, a dry powder is led first to a separate electric
35 field and after that to the final electric field. Particles of the dry powder are pre-charged in a charging unit comprising a corona charging electrode, an electrode having a different potential compared to the

corona charging electrode (e.g. a grounding electrode, an electrode in a lower or opposite potential), and a feeding nozzle.

5 Particles may also be charged by triboelectric charging, for example charging the particles by a friction between the particles, and walls of a transfer pipe, or a storage bin. After that the particles enter to another charging unit, which conducts the final charging of the particles. The final electric field is formed by electrodes at opposite sides of the substrate. The electrodes can be corona charging electrodes and a
10 grounding electrode, other suitable electrodes and a grounding electrode, or electrodes being in different potentials at opposite sides of the substrate. The pre-charged particles are blown towards a substrate to be coated through a nozzle.

15 In the following, the invention will be described by means of figures. In figures,

Fig. 1. shows the first embodiment of the invention, and

20 Fig. 2. shows the second embodiment of the invention.

According to Fig.1, a dry powder is led to a charging electrode 1 comprising a feeding nozzle. Particles of the dry powder are charged by the charging electrode 1. The charging electrode is located farther
25 from other electrodes 2 so that the particles are pre-charged when they enter to the final electric field formed by the corona charging electrodes 1, 2 and a grounding electrode 3. The pre-charged particles are blown towards a substrate 4 to be coated. The substrate 4 is preferably in a web form. The grounding electrode 3 can be a stationary platy
30 electrode, or it can be a roll rotating about its axis. The rotating roll is a preferred choice.

According to Fig. 2, a dry powder is led to a first electric field and after that to a second electric field. Particles of the dry powder are charged
35 in a charging unit 7 comprising a corona charging electrode 6, a grounding electrode 5, and a feeding nozzle 8. The particles are pre-charged in the first electric field created in the charging unit 7 before

7

entering to the second electric field formed by the corona charging electrodes 2 and a grounding electrode 3. The pre-charged particles are blown towards a substrate 4 to be coated. As in the embodiment shown in Fig. 1, the remarks concerning the form of the substrate 4
5 and the preferred grounding electrode 3 are also valid in this embodiment.

The invention is not restricted to the description above, but the invention may vary within the scope of the claims.

10

Claims:

1. A method for a preliminary treatment of particles of a powder in a dry surface treatment process before applying the powder particles on a surface of a substrate by utilizing an electric field created by electrodes, which are located at opposite sides of the substrate in such a way that at least one first electrode is located at the side of the substrate to be coated, and at least one second electrode is located at the opposite side of the substrate, **characterized** in that the particles of the powder are pre-charged before bringing them into the electric field.
2. The method according to claim 1, **characterized** in that at least one first electrode comprising a feeding nozzle is located at a longer distance from the substrate than the other electrode/s at the same side in such a manner that the pre-charging is effected.
3. The method according to claim 1, **characterized** in that a separate electric field is created outside the electric field created between the first and second electrode/s at the side of the substrate to be coated by the powder particles, and the pre-charging is effected in the separate electric field.
4. The method according to claim 3, **characterized** in that the separate electric field is created in a charging unit comprising a corona charging electrode, a grounding electrode and a feeding nozzle.

1/2

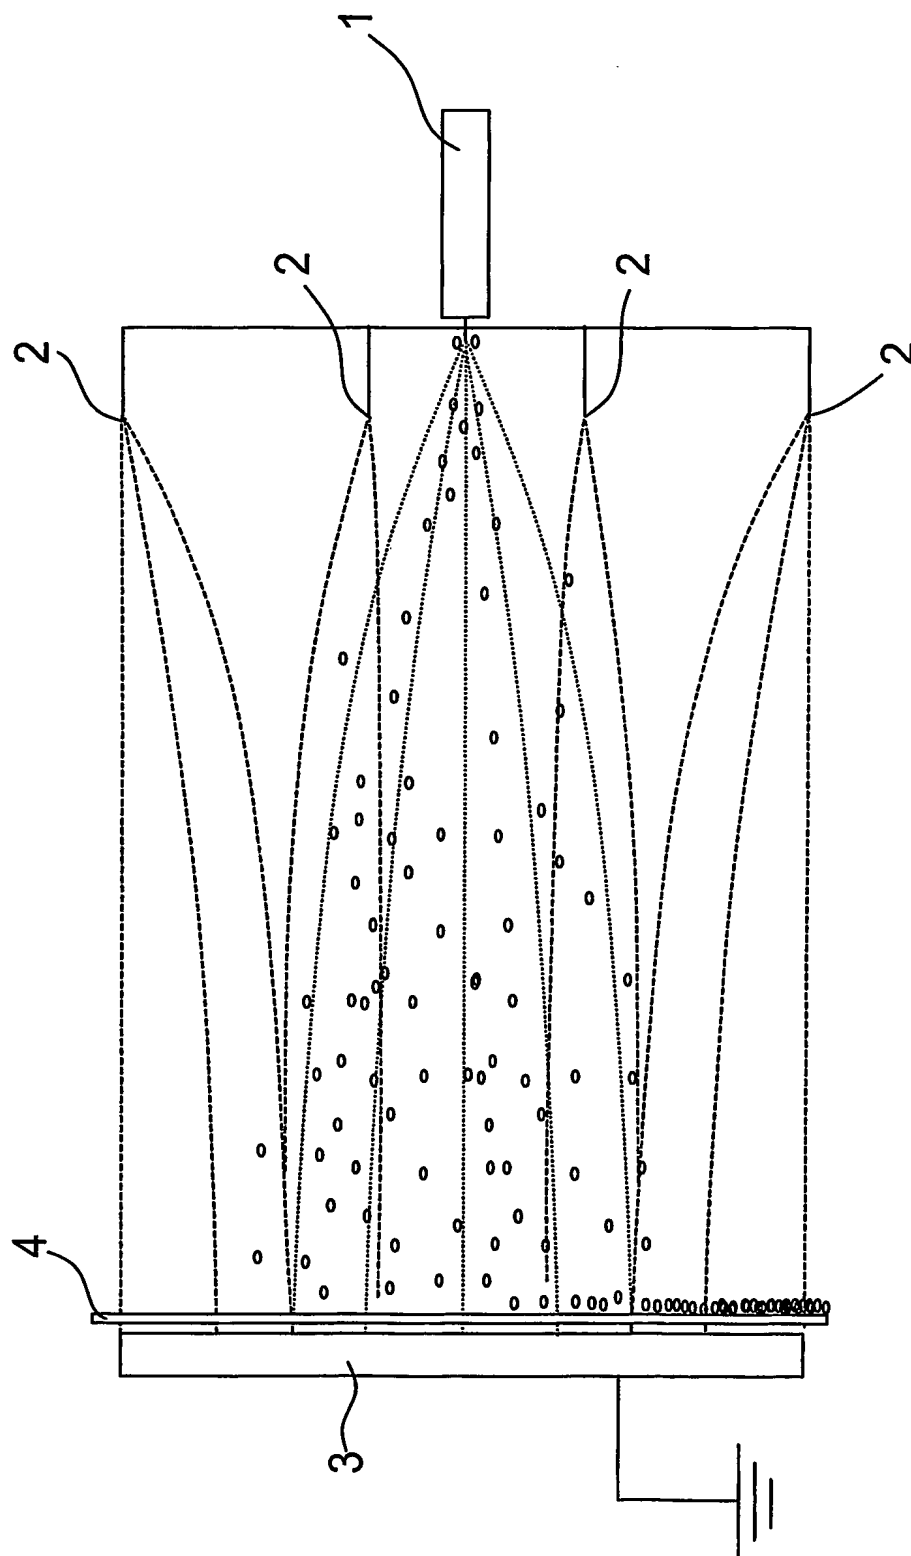


Fig. 1

2/2

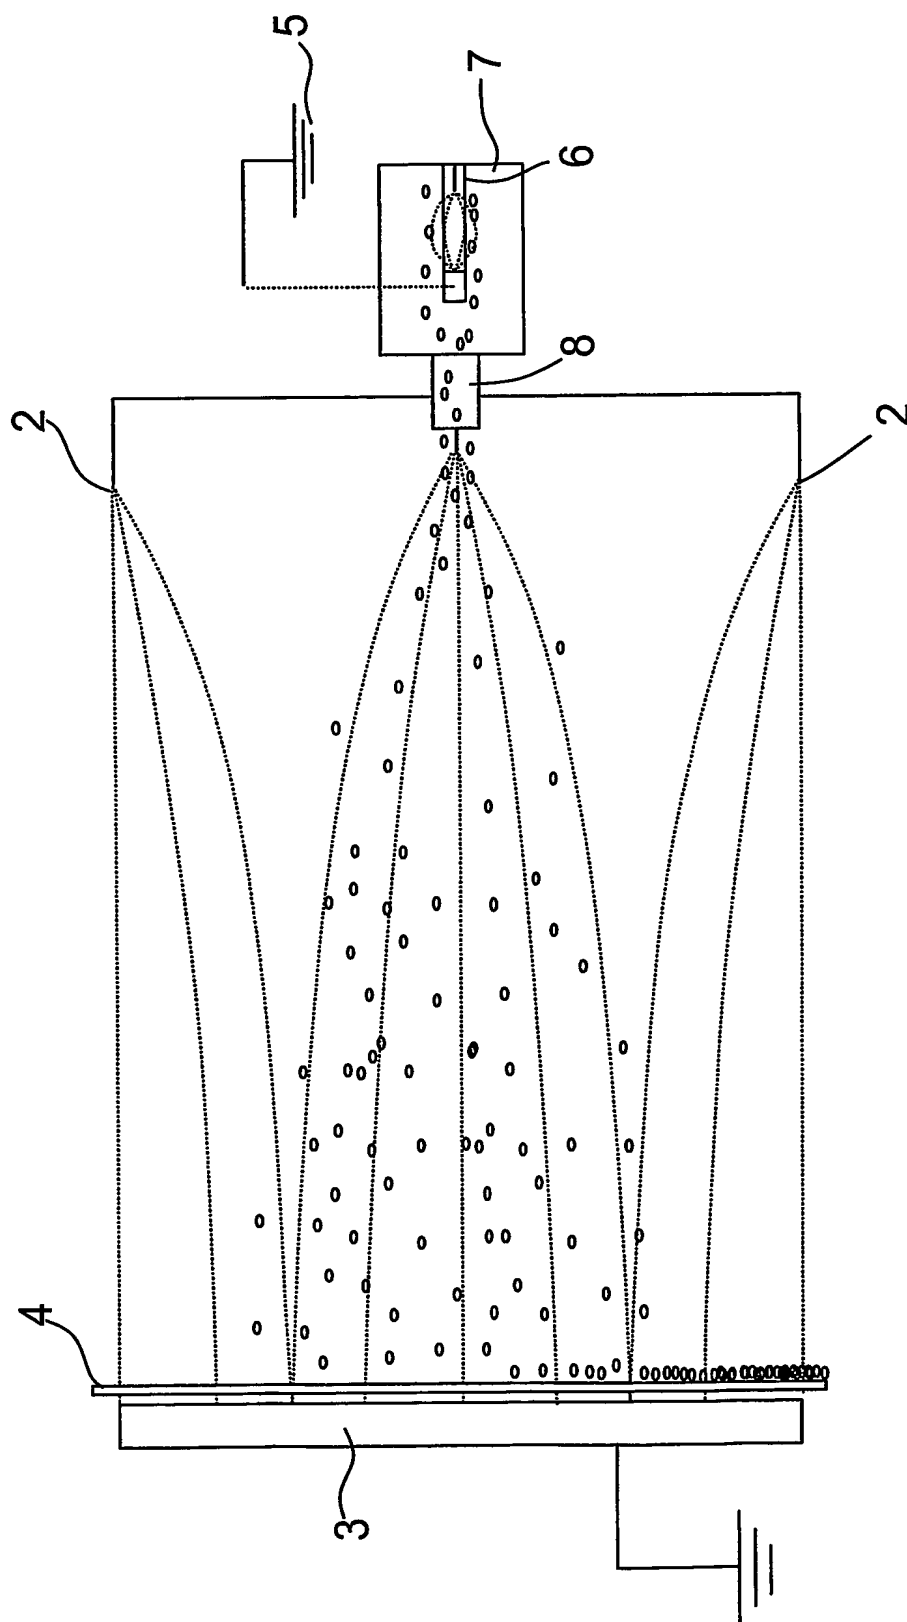


Fig. 2

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
18 September 2003 (18.09.2003)


PCT

(10) International Publication Number
WO 03/076715 A3

- (51) International Patent Classification⁷: **D21H 23/50**, (74) Agent: **TAMPEREEN PATENTTITOIMISTO OY**;
B05D 1/06 Hermiankatu 12 B, FIN-33720 Tampere (FI).
- (21) International Application Number: PCT/FI03/00180 (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 11 March 2003 (11.03.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20020479 14 March 2002 (14.03.2002) FI
20021253 26 June 2002 (26.06.2002) FI
- (71) Applicant (*for all designated States except US*): **METSO PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).
- (72) Inventors; and (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (75) Inventors/Applicants (*for US only*): **PUTKISTO, Kaisa** [FI/FI]; Poukamankatu 7 C 8, FIN-33720 Tampere (FI). **MAIJALA, Juha** [FI/FI]; Messukylänkatu 37 B 12, FIN-33700 Tampere (FI). **KÄSMÄ, Veli** [FI/FI]; Lintuvidankatu 33 G 26, FIN-33340 Tampere (FI).
- Published:
— with international search report

[Continued on next page]

(54) Title: METHOD FOR TREATING POWDERY PARTICLES

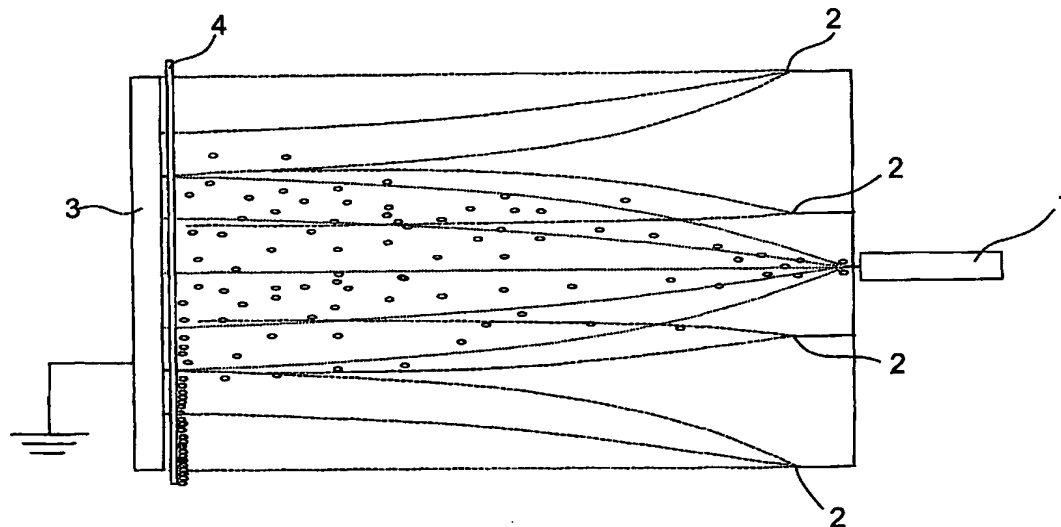

(57) Abstract: The invention relates to a method for a preliminary treatment of particles of a powder in a dry surface treatment process before applying the powder particles on a surface of a substrate (4) by utilizing an electric field created by electrodes (1, 2, 3). The electrodes are located at opposite sides of the substrate in such a way that at least one first electrode (1, 2) is located at the side of the substrate to be coated, and at least one second electrode (3) is located at the opposite side of the substrate. In the method of the invention, the particles of the powder are pre-charged (1) before bringing them into the electric field.

WO 03/076715 A3



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:
4 December 2003

INTERNATIONAL SEARCH REPORT

International Application No
PCT/FI 03/00180

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 D21H23/50 B05D1/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 D21H B05D B05B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|---|-----------------------|
| X | WO 97 36049 A (DSM NV ;HUBER FA MICHAEL MUENCHEN (DE); MISEV TOSKO ALEXANDER (NL)) 2 October 1997 (1997-10-02) the whole document ---- | 1 |
| X | DE 26 46 798 A (HAUG & CO KG) 20 April 1978 (1978-04-20) page 4 -page 12; claims 1-12; figure 5 ----- | 1-4 |
| X | DE 196 32 899 A (WEITMANN & KONRAD FA) 19 February 1998 (1998-02-19) the whole document ----- | 1-4 |

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

25 September 2003

Date of mailing of the international search report

06/10/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5816 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Nestby, K

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/FI 03/00180

| Patent document cited in search report | | Publication date | Patent family member(s) | Publication date |
|---|---|---------------------|---|--|
| WO 9736049 | A | 02-10-1997 | AU 1947897 A DE 69704860 D1 DE 69704860 T2 EP 0895552 A1 ES 2159390 T3 JP 2000508007 T WO 9736049 A1 US 6342273 B1 | 17-10-1997 21-06-2001 28-03-2002 10-02-1999 01-10-2001 27-06-2000 02-10-1997 29-01-2002 |
| DE 2646798 | A | 20-04-1978 | DE 2646798 A1 | 20-04-1978 |
| DE 19632899 | A | 19-02-1998 | DE 19632899 A1 WO 9807568 A1 | 19-02-1998 26-02-1998 |